



### Main Features

- ◆ Intel® Atom™ N270 Platform
- ◆ Low power consumption
- ◆ Slim and fan-less
- ◆ DVI and VGA output, dual independent display
- ◆ Hyper-Threading Support

### Product Overview

NDiS series are developed by NEXCOM for dedicated Digital Signage application. NDiS 120 is specially for client side to display content.

Because of Atom™ N270 + 945GSE platform, it has low power consumption and totally fan-less design. NDiS 120 is suitable as an entry level Digital Signage device for advertising, hospitality and promotion activity applications.

NDiS 120 supports VGA + DVI-D 2 independent display, 4 USB 2.0 ports, Mini-PCIe socket, Giga LAN and RS232 COM port.

### Specifications

#### Main Board

- ◆ Intel® Atom™ N270 1.6GHz CPU onboard
- ◆ Chipset 945GSE + ICH7M
- ◆ Intel® Graphic Engine GMA 950

#### Main Memory

- ◆ 1 x SO-DIMM, DDR2 400/533, up to 2 GB

#### I/O Interface-Front

- ◆ 1 x LED Power-On
- ◆ 1 x LED Storage

#### I/O Interface-Rear

- ◆ 1 x DB9 RS232 COM port
- ◆ 1 x DB15 VGA port
- ◆ 1 x DVI-D port
- ◆ 4 x USB 2.0 port
- ◆ 1 x RJ45 with LEDs for 10/100/1000 Mbps Ethernet
- ◆ 1 x Antenna hole for WiFi
- ◆ 12VDC Power In

#### Storage

- ◆ 1 x 2.5" SATA HDD Bay

#### Expansion

- ◆ 1 x Mini-PCIe socket (PCIe x1, USB 2.0 x1)

#### Dimensions

- ◆ 272mm (W) x 195mm (D) x 44mm (H) (10.7" x 7.7" x 1.7") w/o mounting bracket

#### Power Input

- ◆ 1 x External 60W AC/DC power adaptor (In: 90VAC~264VAC. Out: 12VDC)


#### Environment

- ◆ Operating Temperature: Ambient with air flow from 0°C ~ 40°C (HDD inside)
- ◆ Storage Temperature: -20°C ~ 60°C, Humidity: 10% ~90% @40°C

#### Certification

- ◆ CE approval
- ◆ FCC Class A

## Dimension Drawing

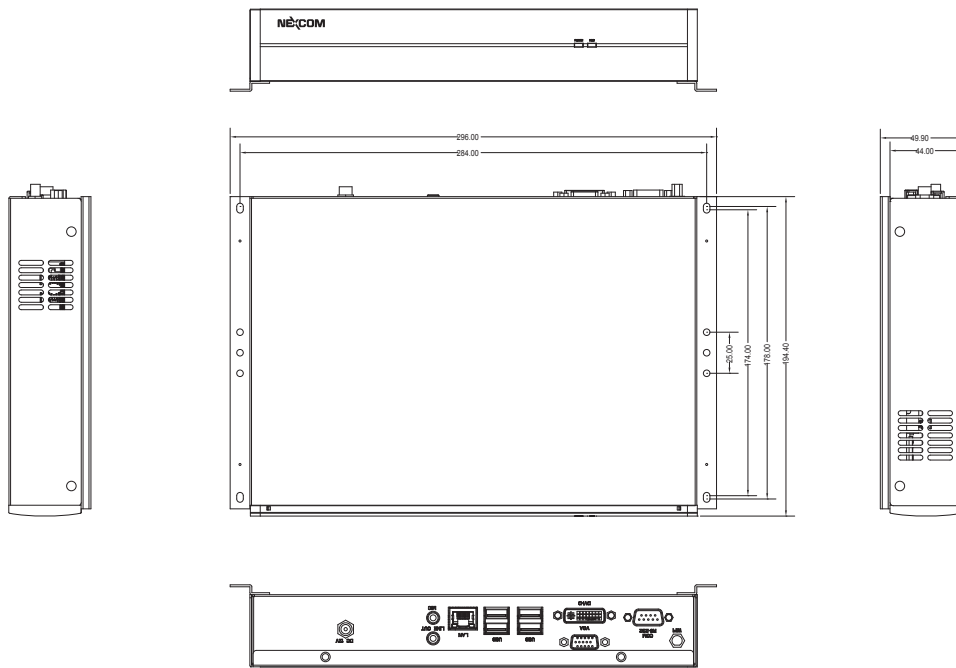

## Ordering Information

- **NDiS 120 (P/N: 10W00012000X0)**  
Intel® N270 Processor onboard  
Intel® 945GSE/ICH7M